


i-CHD / a-CHD

i-CHD: New generation cassette with EC high efficiency motor.
Centrifugal fan with continuous air flow regulation and speed modulation.
Energy consumption reduced by more than 50%.

a-CHD: New cassette with traditional 5 speed motor.



Perfect
Comfort

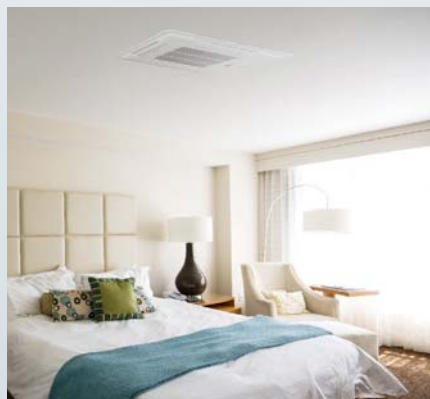

Reduced
Consumption



Silent
Operation



i-CHD / a-CHD


A new way to live comfort

The new i-CHD/a-CHD range has been specifically developed to be adapted to every ambient thanks to its modern and minimal design, which is a result of the full experience and know-how Climaveneta.

Perfect Comfort

The new i-CHD cassette is synonym of real comfort and lowest operating costs. The brushless motor ensures the perfect adaptation to the thermal load in the ambient, and reduces the temperature fluctuations comparing to set point parameters.

Centrifugal fans operate through a continuous air flow modulation, with no speed steps or relay switching as traditional fan coil units.

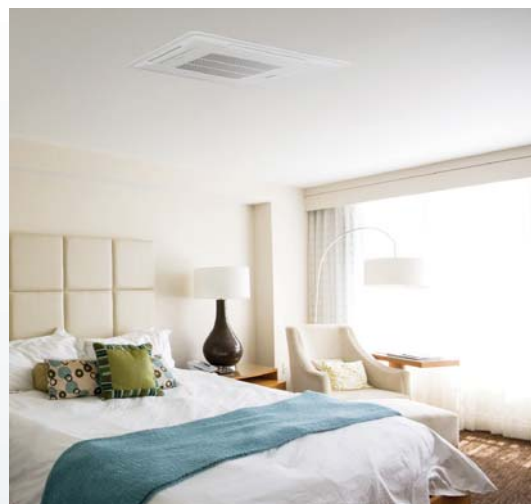


Reduced Energy Consumption

The i-CHD unit features an electrical absorption 50% lower than traditional cassette of the same size.

The advantages of this increased efficiency are enhanced over the whole operating year, making available the saved energy for other components of the system, or improving the building energy efficiency ratio.

Energy Consumption at medium speed

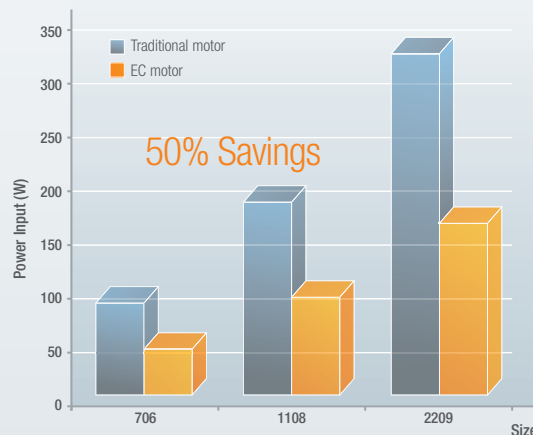

Complete Integration

The i-CHD cassette offers a wide versatility and easy installation. User-friendly interface of the controller with the LCD screen allows the full management of all operating conditions.

Furthermore, it is possible to integrate i-CHD units in Master / Slave networks and Building management system (e.g. Idrorelax by Climaveneta). i-CHD interfaces guarantee a quick and simple installation thanks to only two wires connection.



Comfort, efficiency and integration without compromise

Today comfort has a new name: i-CHD. The new generation cassette featured by high efficiency, low noise and integration capability.

Silent Operation

Thanks to the continuous fan speed modulation, the noise produced in order to keep the temperature set-point is extremely low.

The adaptation to new set values or different loads is carried out by the gradual variation of fan speed. The acoustic emissions mingle therefore with the background noise and are almost imperceptible to human ears.

Ease of installation and maintenance

From the moment of the installation, the management and the maintenance is made simple and intuitive. All the main parts can be easily accessed through the front grille:



- Easy removable air filters
- Manual air valve with outlet connected to the plastic condensate collecting tray
- Condensate drain pump with 500 mm working head, complete with float
- Set-up for fresh air intake
- Set-up for duct air distribution

Design

i-CHD/a-CHD are advanced solutions for the requirements of modern residential and commercial architecture, even more sensible to design and aesthetics. Featured with a simple and refined design that perfectly fits to any ambient, i-CHD/a-CHD only use high quality materials.

The units are now available in three sizes in order to meet any kind of installation requirement:

- 60x60cm
- 80x80cm
- 90x90cm

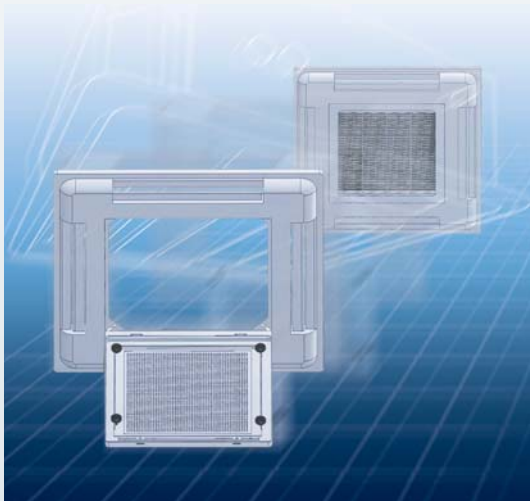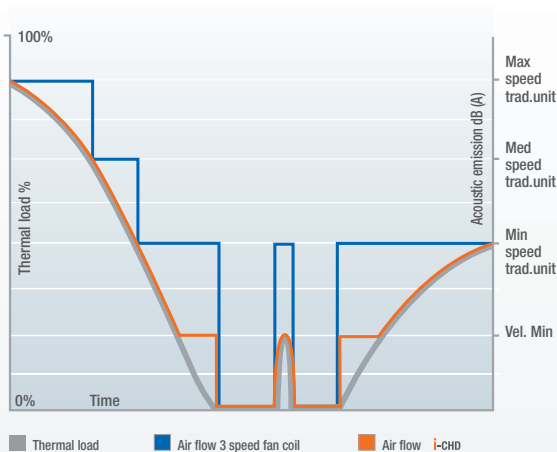

i-CHD / a-CHD



A new way to live comfort



Frame

Frame in galvanised steel insulated with self-extinguishing closed-cell polyethylene blanket of suitable thickness, to limit heat loss and noise to a minimum.

Front panel and grille are already assembled on the unit. Airflow grille in ABS. Manual and independent louvers adjustable for vertical airflow direction.



Control Box

Plug In Control Box complete of switchboard with power and control terminal block.

Electrical power and control switchboard, complete with electronic air flow regulator and terminal board for connection to network and available remote controls.



Coils

Coil with corrugated aluminum fins and copper pipes, tested with dried air at 14 bar. A cutting-edge technology that contributes to a better energy efficiency of the product, improving the exchanging of thermal heat.



EC Motor

AC Motor with 5 speed for traditional units.


Low consumption EC electric motor that guarantees a precise and continuous control of speed rotation.

The unit results in a reduced power absorption of approximately 50% compared to the traditional ON/OFF motor.




Controllers

i-CHD controllers

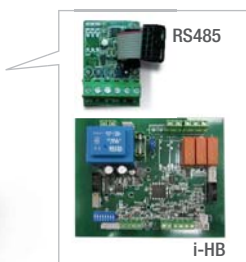

EKW wall mounted

Room thermostat, manual- and automatic regulation of fan, manual- and automatic mode, change-over, room- and minimum temperature probes, regulation of electric heater, valves (on/off or modulating), serial connection for mini-network and integration into BMS- or Idrorrelax systems. The management and control of all functions is guaranteed by the Power Board Kit-HB. In combination with i-HB is supplied the kit RS485 as interface for centralized management systems.

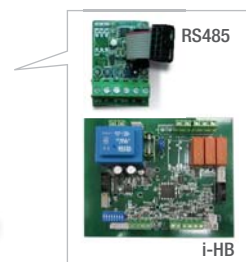

iK universal

Advanced electronic control with LCD display, room thermostat, manual and automatic regulation of fan, manual- and automatic mode change-over, room and minimum temperature probes, regulation of electric heater, valves (on/off or modulating), serial connection for mini-network and integration into BMS or Idrorrelax systems. The management and control of all functions is guaranteed by the Power Board Kit-HB. In combination with i-HB is supplied the kit RS485 as interface for centralized management systems.

Master / Slave Integration

The controllers can be set as:

- **GLOBAL** user interface: the controller acts as the Master and manages operation of all the units. All the fan coils connected to the network will operate in the same mode.
- **PRIVATE** user interface: if one cassette needs to operate in different conditions from the MASTER, the respective controller can work autonomously through a different configuration of the dip switch.



a-CHD / i-CHD controllers *



MTW wall mounted

Room thermostat, fan speed slider, mode slider, room- and minimum temperature probes and regulation of on/off valves.

* for 3 speed i-CHD unit only



ATW wall mounted

Room thermostat, manual- and automatic regulation of fan, manual- and automatic mode change-over, room- and minimum temperature probes and command of on/off valves. Malfunction digital contact. Configuration dip switch.



Infrared remote control

Set-point regulation. Easy selection of the functioning mode (cooling, heating, dehumidification, ventilation) and the fan speed (Max, Med, Min, AUTO). User-friendly and compact remote control with fine aesthetics. The receiver must be connected to i-HB Power Board that must be mounted on board of the unit.

a-CHD

General technical data

a-CHD		0606	0706	1108	2209
ELECTRICAL DATA					
Power supply	V/ph/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Max absorbed power	W	60	85	147	310
PERFORMANCE					
MAX SPEED					
Air flow	m ³ /h	575	810	1300	2250
Total capacity in cooling mode	(1) kW	3,20	4,56	6,90	11,5
Sensible capacity in cooling mode	(1) kW	2,50	3,17	5,06	8,21
Max water flow	(1) m ³ /h	0,55	0,79	1,19	1,98
Max pressure drop	(1) kPa	10,0	36,4	30,9	49,0
Total capacity in heating mode	(2) kW	3,64	6,14	8,54	14,1
Water flow in heating	(2) m ³ /h	0,55	0,79	1,19	1,99
Pressure drop in heating	(2) kPa	7,2	34,4	26,8	46,4
Noise Pressure	(3) dB(A)	37	49	54	59
Noise Power	(4) dB(A)	48	60	65	70
MED SPEED					
Air flow	m ³ /h	290	617	960	1970
Total capacity in cooling mode	(1) kW	2,06	3,76	5,60	10,2
Sensible capacity in cooling mode	(1) kW	1,62	2,85	4,37	7,37
Max water flow	(1) m ³ /h	0,35	0,65	0,96	1,76
Max pressure drop	(1) kPa	4,7	25,5	21,2	39,1
Total capacity in heating mode	(2) kW	2,40	4,97	6,69	12,6
Water flow in heating	(2) m ³ /h	0,35	0,64	0,96	1,76
Pressure drop in heating	(2) kPa	3,7	19,9	17,3	36,5
Noise Pressure	(3) dB(A)	29	41	46	54
Noise Power	(4) dB(A)	40	52	57	65
MIN SPEED					
Air flow	m ³ /h	200	450	700	1380
Total capacity in cooling mode	(1) kW	1,41	2,70	3,57	7,69
Sensible capacity in cooling mode	(1) kW	1,11	2,15	2,96	5,52
Max water flow	(1) m ³ /h	0,24	0,46	0,61	1,32
Max pressure drop	(1) kPa	2,4	13,8	9,4	23,0
Total capacity in heating mode	(2) kW	1,60	3,51	4,68	9,36
Water flow in heating	(2) m ³ /h	0,24	0,46	0,61	1,34
Pressure drop in heating	(2) kPa	2,1	8,2	7,1	21,1
Noise Pressure	(3) dB(A)	24	31	35	47
Noise Power	(4) dB(A)	35	42	46	58
SIZE AND WEIGHT					
A	(5) mm	575	575	730	830
B	(5) mm	575	575	730	830
H	(5) mm	250	290	290	290
Operating weight	(5) kg	28	30	36	50

a-CHD		0706	1108	2209
ELECTRICAL DATA				
Power supply	V/ph/Hz	230/1/50	230/1/50	230/1/50
Max absorbed power	W	85	147	
4 PIPES SYSTEM CONFIGURATION				
MAX SPEED				
Air flow	m ³ /h	810	1300	2250
Total capacity in cooling mode	(1) kW	3,45	5,70	7,92
Sensible capacity in cooling mode	(1) kW	2,88	4,46	6,57
Max water flow	(1) m ³ /h	0,59	0,98	1,36
Max pressure drop	(1) kPa	22,8	40,4	40,4
Total capacity in heating mode	(2) kW	4,25	5,03	9,65
Water flow in heating	(2) m ³ /h	0,37	0,44	0,85
Pressure drop in heating	(2) kPa	12,6	15,5	26,3
Noise Pressure	(3) dB(A)	49	54	59
Noise Power	(4) dB(A)	60	65	70
MED SPEED				
Air flow	m ³ /h	617	960	1970
Total capacity in cooling mode	(1) kW	2,87	5,21	6,82
Sensible capacity in cooling mode	(1) kW	2,55	4,20	5,97
Max water flow	(1) m ³ /h	0,49	0,90	1,17
Max pressure drop	(1) kPa	17,0	34,4	30,8
Total capacity in heating mode	(2) kW	3,68	4,63	8,63
Water flow in heating	(2) m ³ /h	0,32	0,41	0,76
Pressure drop in heating	(2) kPa	9,3	14,0	20,6
Noise Pressure	(3) dB(A)	41	46	54
Noise Power	(4) dB(A)	52	57	65
MIN SPEED				
Air flow	m ³ /h	450	700	1090
Total capacity in cooling mode	(1) kW	2,42	3,18	5,34
Sensible capacity in cooling mode	(1) kW	2,18	2,76	4,94
Max water flow	(1) m ³ /h	0,42	0,55	0,92
Max pressure drop	(1) kPa	13,0	14,2	19,8
Total capacity in heating mode	(2) kW	3,27	3,42	7,56
Water flow in heating	(2) m ³ /h	0,29	0,30	0,66
Pressure drop in heating	(2) kPa	7,3	9,6	15,4
Noise Pressure	(3) dB(A)	31	36	36
Noise Power	(4) dB(A)	42	47	47
SIZE AND WEIGHT				
A	(5) mm	575	730	830
B	(5) mm	575	730	830
H	(5) mm	290	290	290
Operating weight	(5) kg	30	36	50

(1) Room temperature 27°C d.b./19°C w.b., Chilled water (in/out) 7/12°C

(2) Room temperature 20°C d.b., hot water (in/out) 50/° °C (identical flow rate note 1)

(3) Sound pressure in semianechoic room at 1 (m.) from fan front and 1 (m.) from the ground

(4) Sound power on the basis of measurements made in compliance with Eurovent 8/2.


(5) Unit in standard configuration/execution, without optional accessories.

i-CHD

General technical data

i-CHD		0706	1108	2209
ELECTRICAL DATA				
Power supply	V/ph/Hz	230/1/50	230/1/50	230/1/50
Max absorbed power	W	40	88	200
2 PIPES SYSTEM CONFIGURATION				
MAX SPEED				
Air flow	m ³ /h	810	1300	2100
Total capacity in cooling mode	(1) kW	4,56	6,97	10,9
Sensible capacity in cooling mode	(1) kW	3,20	5,01	7,87
Max water flow	(1) m ³ /h	0,79	1,20	1,88
Max pressure drop	(1) kPa	36,4	31,5	44,3
Total capacity in heating mode	(2) kW	5,42	8,23	13,0
Water flow in heating	(2) m ³ /h	0,78	1,21	1,88
Pressure drop in heating	(2) kPa	34,1	27,5	41,5
Noise Pressure	(3) dB(A)	49	56	56
Noise Power	(4) dB(A)	60	67	67
MED SPEED				
Air flow	m ³ /h	520	820	1380
Total capacity in cooling mode	(1) kW	3,10	4,82	7,69
Sensible capacity in cooling mode	(1) kW	2,20	3,43	5,52
Max water flow	(1) m ³ /h	0,53	0,83	1,32
Max pressure drop	(1) kPa	17,8	16,2	23,0
Total capacity in heating mode	(2) kW	3,72	5,61	9,08
Water flow in heating	(2) m ³ /h	0,53	0,83	1,33
Pressure drop in heating	(2) kPa	11,8	13,1	21,0
Noise Pressure	(3) dB(A)	38	42	44
Noise Power	(4) dB(A)	49	53	55
MIN SPEED				
Air flow	m ³ /h	200	360	820
Total capacity in cooling mode	(1) kW	1,47	2,44	5,04
Sensible capacity in cooling mode	(1) kW	1,01	1,71	3,58
Max water flow	(1) m ³ /h	0,25	0,42	0,87
Max pressure drop	(1) kPa	4,5	4,7	10,4
Total capacity in heating mode	(2) kW	1,63	2,78	5,86
Water flow in heating	(2) m ³ /h	0,25	0,42	0,87
Pressure drop in heating	(2) kPa	1,6	3,3	9,0
Noise Pressure	(3) dB(A)	29	32	34
Noise Power	(4) dB(A)	40	43	45
SIZE AND WEIGHT				
A	(5) mm	575	730	830
B	(5) mm	575	730	830
H	(5) mm	290	290	290
Operating weight	(5) kg	30	36	50

- (1) Room temperature 27°C d.b./19°C w.b., Chilled water (in/out) 7/12°C
- (2) Room temperature 20°C d.b., hot water (in/out) 50/* °C (identical flow rate note 1)
- (3) Sound pressure in semianechoic room at 1 (m) from fan front and 1 (m) from the ground
- (4) Sound power on the basis of measurements made in compliance with Eurovent 8/2.
- (5) Unit in standard configuration/execution, without optional accessories.

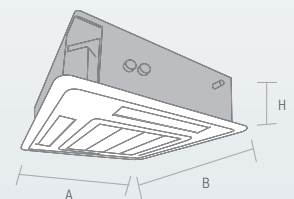

All specifications, data and drawings are indicative and subject to change without notice.


Accessories




Wall controllers




2 way and 3 way valves for main and additional Coil



Branch Duct connection kit



Fresh air Renewal kit



Kit valves 4For2



Expansion Kit RS482 Kit power board i-HB (for i-CHD units only)



A Group Company of **mitsubishi electric**

Climaveneta S.p.A.

Via Sarson 57/c
36061 Bassano del Grappa (VI)
Italy
Tel +39 0424 509 500
Fax +39 0424 509 509
info@climaveneta.com
www.climaveneta.com

Subsidiaries

France

www.climaveneta.fr

Spain

www.climaveneta.es

Poland

www.climaveneta.pl

Germany

www.climaveneta.de

Great Britain

www.climaveneta.co.uk

Russia

ru.climaveneta.com

China

www.climaveneta.com.cn

India

www.climaveneta.in

Middle East

ae.climaveneta.com

Southeast Asia

www.climaveneta.com

Hong Kong

www.climaveneta.com



For more information:

www.climaveneta.com